


## AM 481 PUMP DRIVE

Max. Input Power 700 kW

### QUALITY IS STANDARD

- Nodular iron housing
- Pump pads: 4+ 4 (SAE B, C, D, E, F)
- Max. power: 850 kW - 1140 HP
- Spline shaft: W75x3 DIN 5480
- Through-going shaft
- DIN flanges
- SAE housings: SAE 1-0
- Flexible couplings: 14"-18"
- Pump adapter sizes: SAE B, C, D, E, F

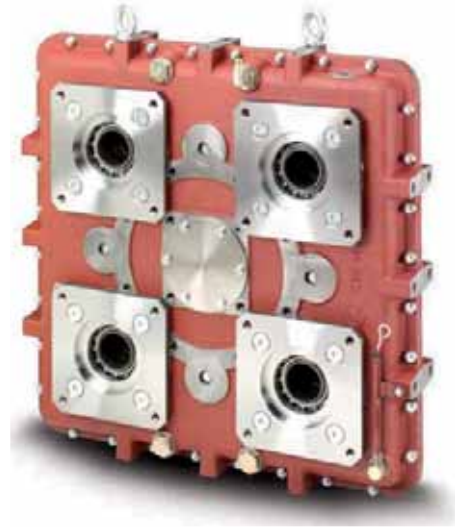

### AM 481 - TECHNICAL DATA

Ratio	Max. input torque M1 (Nm)	Max. output torque M2 (Nm)	Max. input speed N1 (n/min.)	Oil quantity lt	Weight kg
0,72	5500	1600	1700	8,9	374
0,87		1750	1800	8,6	
1,00		1900	1800	8,5	
1,15		2000	2000	8,3	

### AM 481

#### Basic Model - Installation Drawing

