



# HANSA-TMP


MANUFACTURING YOUR SUCCESS

HT 16 / M / 3508 / 0621 / E

THE PRODUCTION LINE OF HANSA-TMP

**Heavy Duty Open Loop System  
Fixed Displacement Axial Piston Pump**

**TPF 60  
(35 ÷ 50 cm<sup>3</sup>/rev.)**

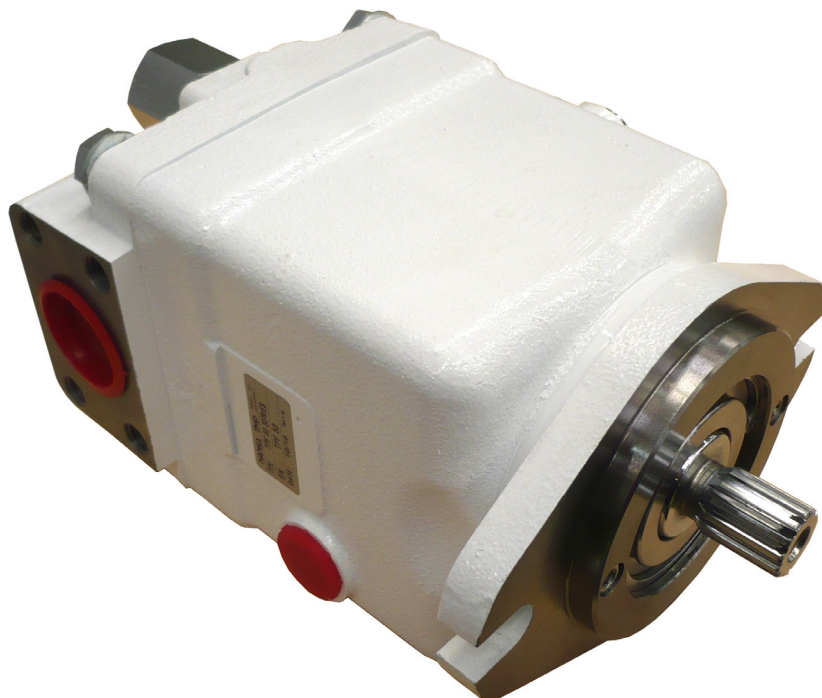




**CONTENTS**

General Information.....	4
Port, Shaft and Flange Types.....	5
Pump Dimensions.....	5
Section View.....	6
Specification Data.....	7
Function Diagrams.....	8 - 9
Overall Dimensions and Ports.....	10 - 11
Drive Shafts.....	12
Shafts Types and Dimensions.....	13
Ordering Code.....	14
Speed Sensors.....	15 - 16
Installation.....	17 - 19
Fluid Viscosity Limits.....	20
Basic and Application Formulas.....	21

## Hydraulic Pumps Type TPF 60

Heavy Duty Axial Piston Pumps Fixed Displacement  
for open loop circuit

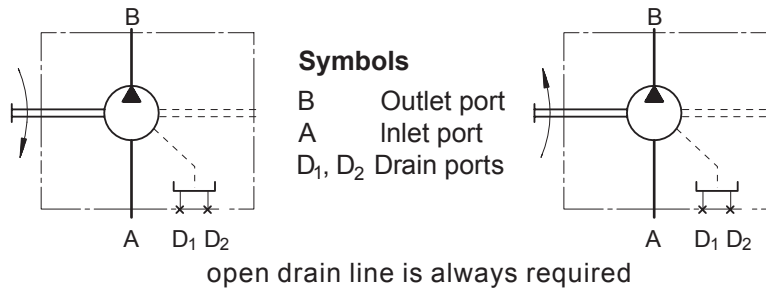

### APPLICATION

Open loop circuit  
 Agricultural machines  
 Road building machines  
 Mining machinery  
 Food industry machines  
 Special vehicles

### OPTIONS




Swash plate  
 Port options  
 Shaft options  
 High pressure ports

### ADVANTAGES

Low noise  
 Low pulsation  
 Long service life  
 High power density

### GENERAL

Displacement,	cm <sup>3</sup> /rev	36,16÷49.94
Max. Driving Speed,	RPM	2800
Max. Driving Torque,	Nm	278
Max. Output,	kW	54
Max. Pressure Drop,	bar	350
Max. Oil Flow,	lpm	132
Min. Driving Speed,	RPM	500
Fluid	Mineral based- HLP (DIN 51524) or HM (ISO 6743/4)	
Temperature Range,	°C	-40÷82
Optimal Viscosity Range,	mm <sup>2</sup> /s	12÷68
Filtration	ISO code 18/16/13 (Min. recommended fluid filtration of 10 micron)	

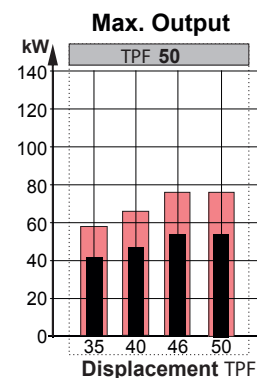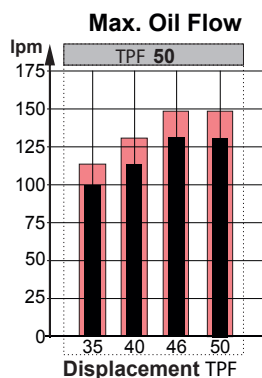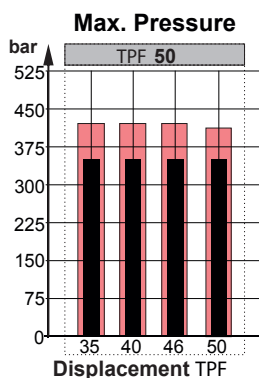

Intermittent values

Continuous values

## Port, Shaft and Flange Types

### Cross Table - Flange Types

TPF 60	Type of flanges
x	B -2-Bolt, SAE B, SD. 101.6, BC. 146, BD. 14.3

### Legend

BC (Bolt Circle) - Center point of bolt holes  
 BD (Bolt Diameter) - Diameter of bolt holes  
 SD (Spigot Diameter) - Center Diameter

### Cross Table - Shaft Types


TPF60	Type of shafts
x	SD $\phi 21.72$ Spline SAE 13T 16/32 DP, M8-6H thread
x	GF $\phi 24.9$ Spline SAE 15T 16/32, 3/8-16 UNC-2B thread
x	CK $\phi 22.2$ Straight, M8-6H thread, parallel key 1/4"x1/4"x1" BS46
x	MK $\phi 22.2$ Straight, M8-6H thread, parallel key 1/4"x1/4"x1 1/2" BS46
x	CM $\phi 25.4$ Straight, M8-6H thread, parallel key 1/4"x1/4"x1" BS46
x	CS $\phi 32$ Straight, M8-6H thread, parallel key A10x8x45 DIN6885


### Cross Table - Port Types

PORTS SIZE - THREAD OPTION	
TPF 60	Type of threads
default	Inlet ISO 6162-1 DN38, Outlet ISO 6162-2 DN19, drain ports M18x1.5

## PUMP DIMENSIONS

The below dimensions are for **comparison only**. The pumps can obtain different shafts and end covers.

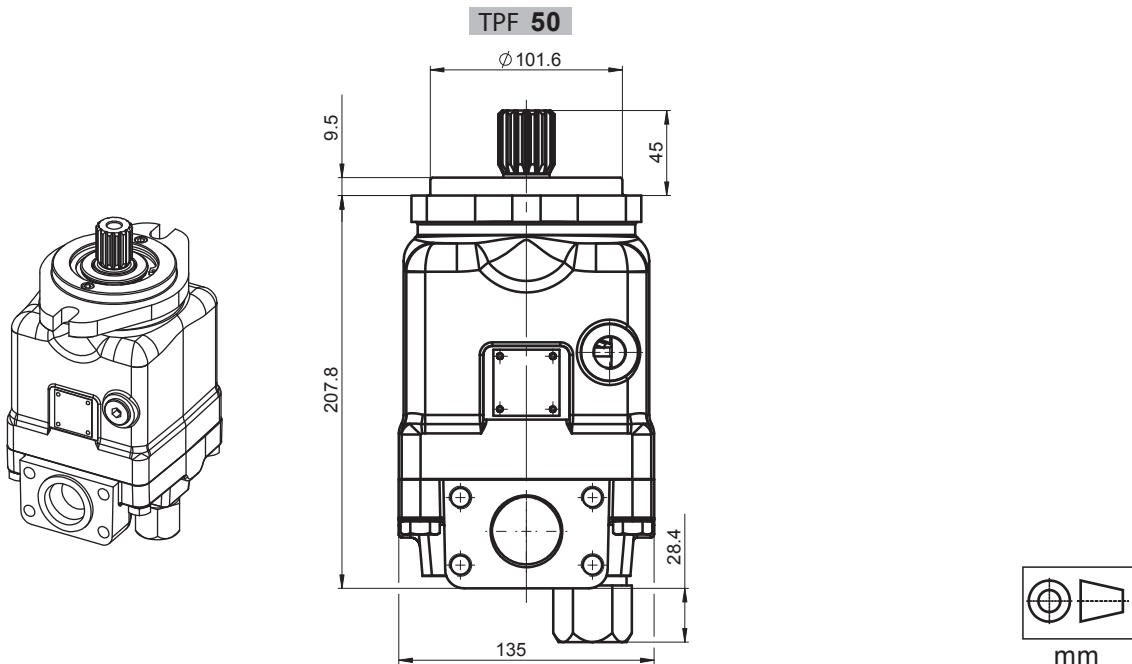

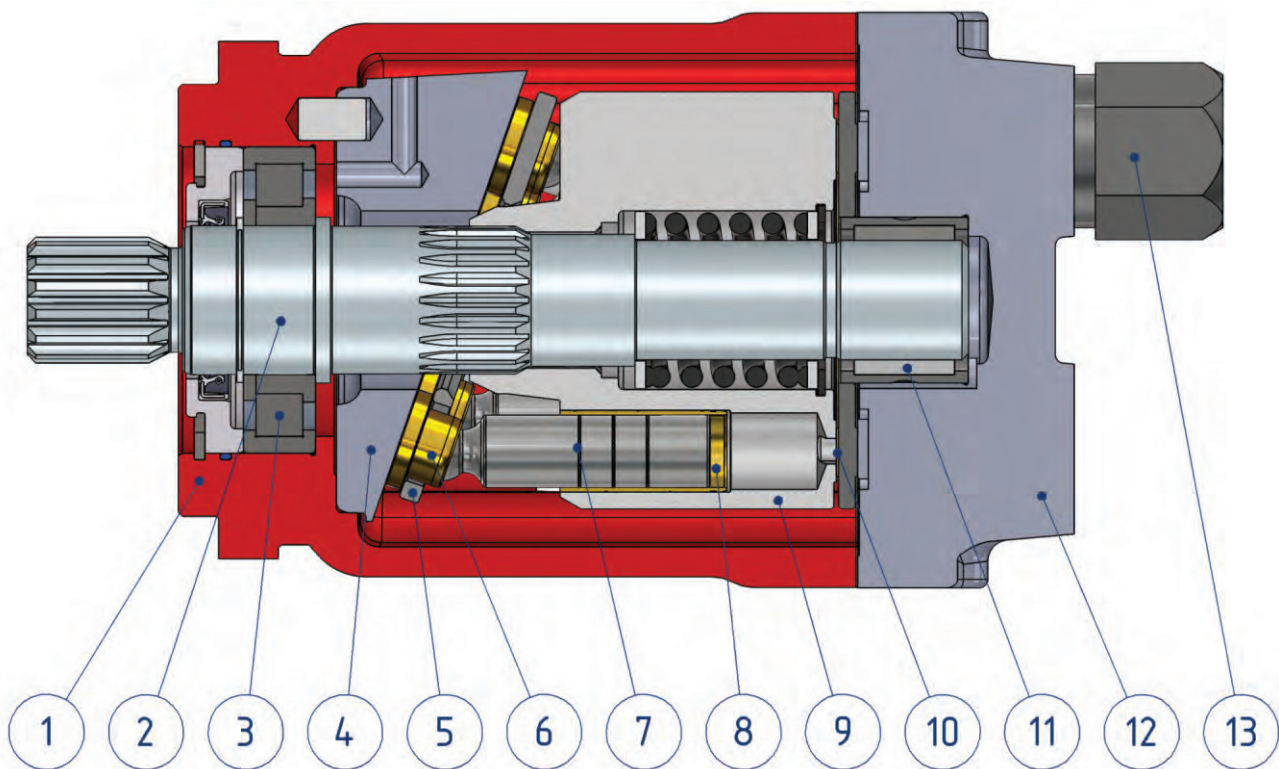**SECTION VIEW**

1. Cast iron body
2. Hardened shaft
3. Robust radial - axial roller bearing
4. Solid swash plate
5. Retainer plate
6. Improved piston shoes
7. Improved pistons
8. Brass bushings
9. Hardened steel cylinder block
10. Bimetal distributor
11. Needle bearing
12. Solid end cover
13. Part of hydraulic system helps reduces pump noise and vibration

The heavy duty design of TPF pumps gains big advantage over the typical swash plate pumps. One of them is a special hydraulic system, which reduces noise and vibration created from pump. Another big advantage of our design, which in general is typical for swash plate pumps, is that the pulsations during the operation are much less. In general the swash plate pumps are more reliable than the bent axis pumps and gear pumps.

**SPECIFICATION DATA**

Type		TPF 35	TPF 40	TPF 46	TPF 50
<b>Displacement,</b> <b>cm.<sup>3</sup>/rev.</b>		36.16	41.59	47.13	49.94
<b>Max. Driving Speed,</b> <b>RPM</b>	Cont.	2800	2800	2800	2500
	Int.*	3150	3150	3150	2800
<b>Max. Driving Torque,**</b> <b>Nm</b>	Cont.	202	232	263	278
	Int.**	242	278	315	326
<b>Output,</b> <b>kW</b>	Cont.	41	47	54	54
	Int.**	58	67	77	77
<b>Max. Pressure,</b> <b>bar</b>	Cont.	350	350	350	350
	Int.**	420	420	420	410
<b>Max. Oil Flow,</b> <b>lpm</b>	Cont.	100	116	132	132
	Int.*	114	131	148	148
<b>Permissible Shaft Load</b>					
<b>max Axial**** N</b>		Fa=2000			
<b>max Radial**** N</b>		Fr=3600			
<b>Min. Speed, RPM</b>		500			
<b>Max. Pressure in Drain Line, bar</b>		5 open drain line is always required			
<b>Weight, kg</b>		20,5			

\* Intermittent speed (flow): for pressure up to 150 bar;

\*\* Intermittent load: the permissible values may occur for max. 10% of every minute;


\*\*\* Theoretical torque;

\*\*\*\* The calculated max values are based on the optimal direction of the forces Fr, Fa and optimal position of the shaft.

1. The recommended output power for continuous operations should not be exceeded.
2. Recommended filtration as per ISO 4406 cleanliness code 18/16/13 or better. This filtration corresponds to SAE AS 4059 8A/7B/7C. Nominal filtration - 10 micron or better.
3. Recommended a premium quality, anti-wear type mineral based hydraulic oil, HLP (DIN 51524) or HM (ISO6743/4).
4. Recommended oil viscosity - 12...68 cSt or see page 18.
5. Recommended maximum system operating temperature -82°C.
6. To ensure optimum life of the pump, fill it up with fluid prior to load it and run with moderate load and speed for about 10-15 minutes.


**FUNCTION DIAGRAMS**

Sound pressure level (noise) is measured in acoustic chamber according to DIN 45635 Part 1 and Part 26. These diagram is applied for all displacements.

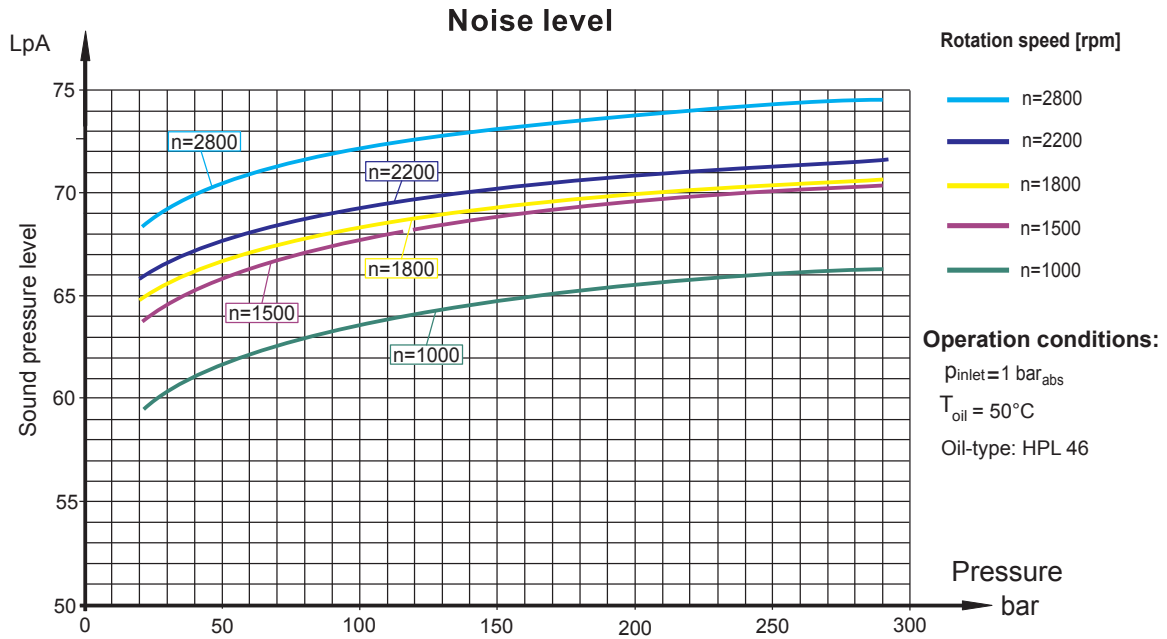

The sound pressure level for a particular pump may vary  $\pm 2 \text{ dB(A)}$  compared to what is shown in the diagram.

The below efficiencies are applied for all displacements.



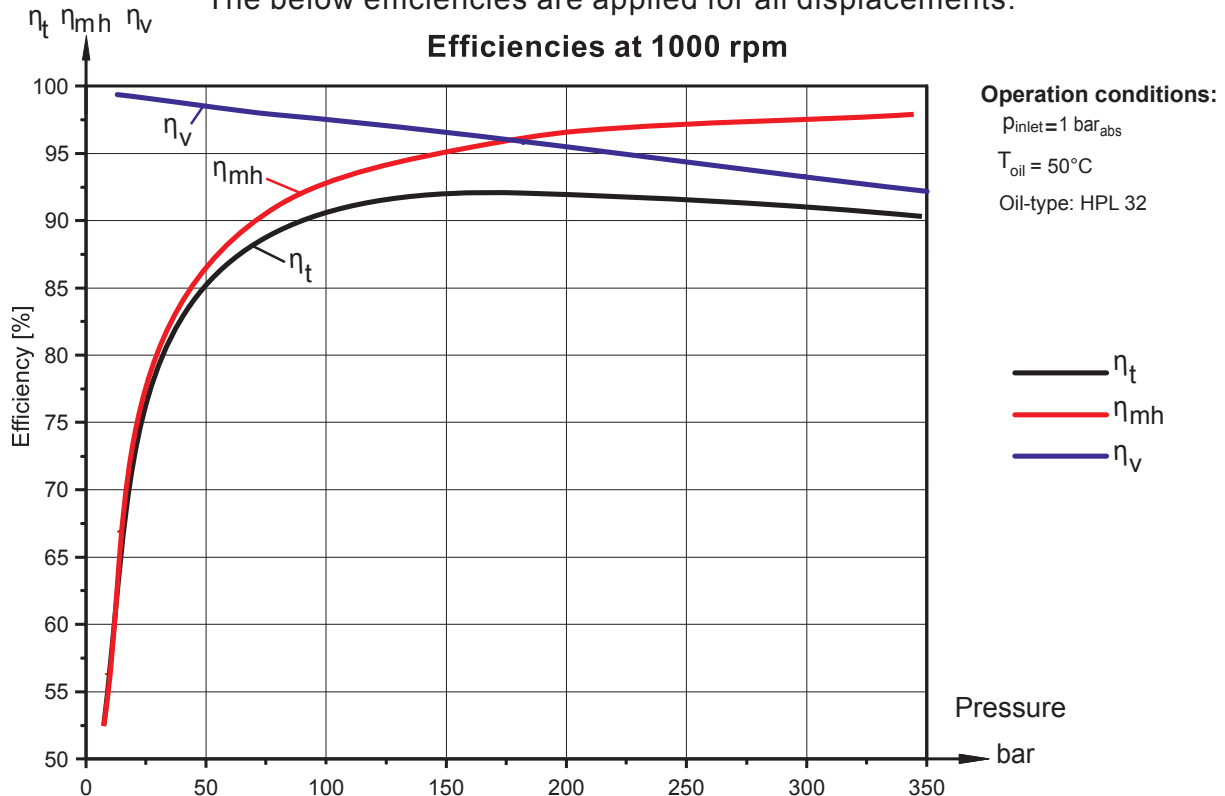


The pump size, pressure, torque, speed of rotation and flow rate required for a specific application can be calculated using the formulas on page 19.

Efficiencies for a particular pump may vary from the shown in the diagram depending on the operating conditions.



**FUNCTION DIAGRAMS**

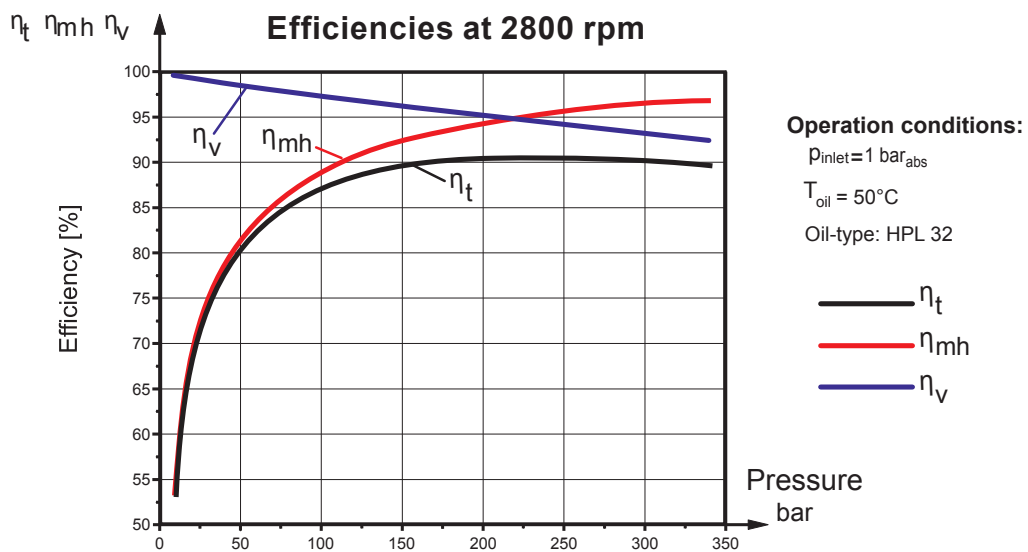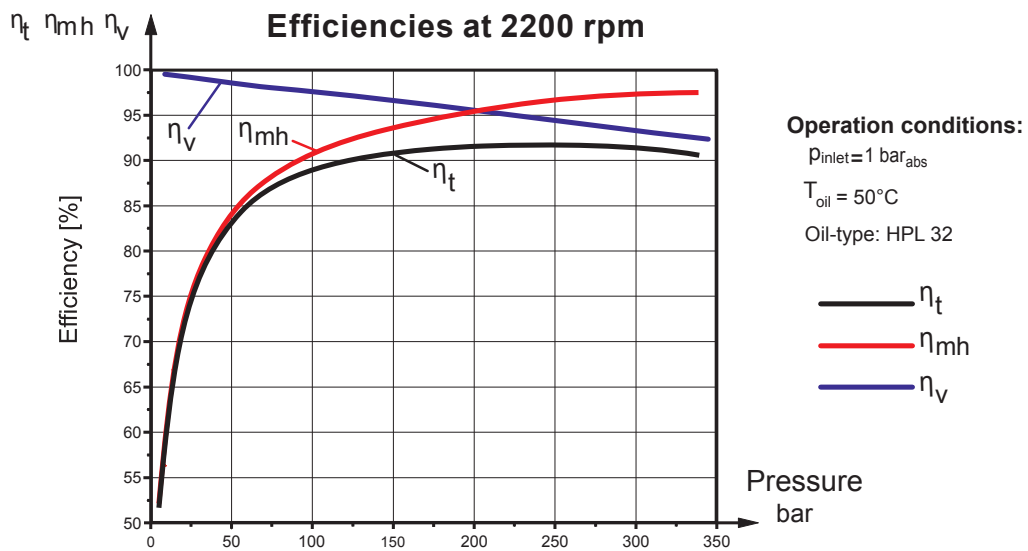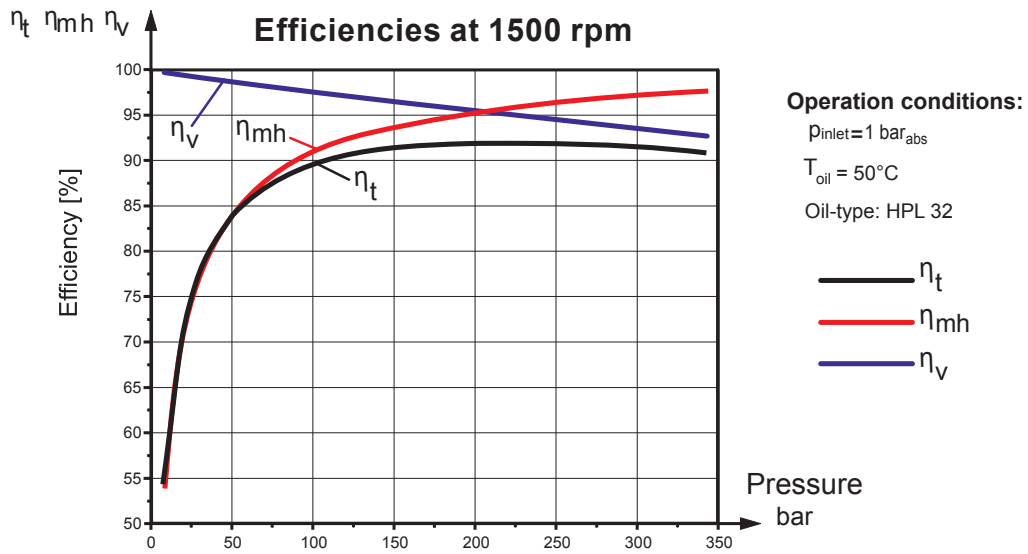


The pump size, pressure, torque, speed of rotation and flow rate required for a specific application can be calculated using the formulas on page 19.


Efficiencies for a particular pump may vary from the shown in the diagram depending on the operating conditions.

**Overall Dimensions and Ports**


Direction of Rotation **CW**(Right)

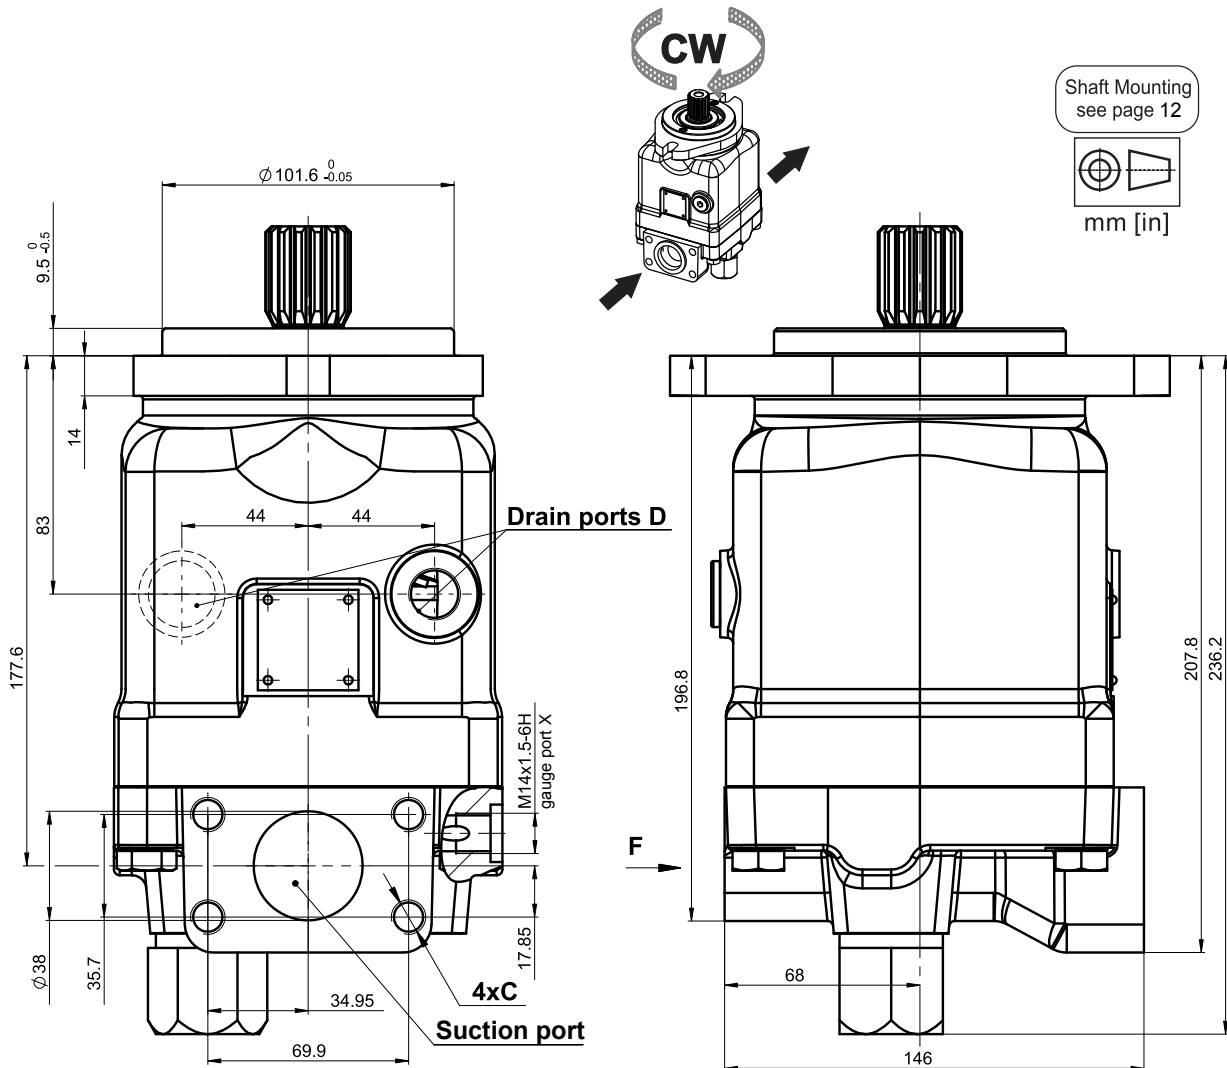

Shaft Mounting  
see page 12




mm [in]

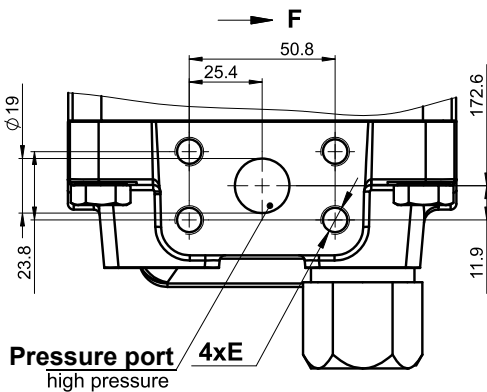


**Pressure port 4xE**  
high pressure

	Port Size default
<b>Inlet</b>	ISO 6162-1 DN38
<b>Outlet</b>	ISO 6162-2 DN19
<b>D</b>	M18x1,5
<b>C</b>	4xM12-6H
<b>E</b>	4xM10-6H

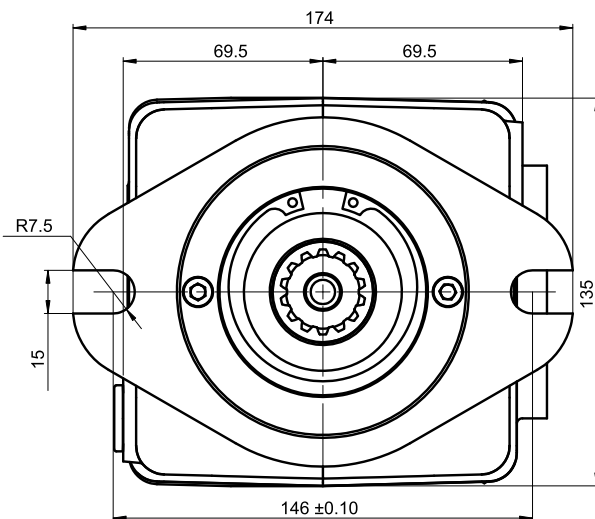


**Overall Dimensions and Ports**

Direction of Rotation **CCW**(Left)

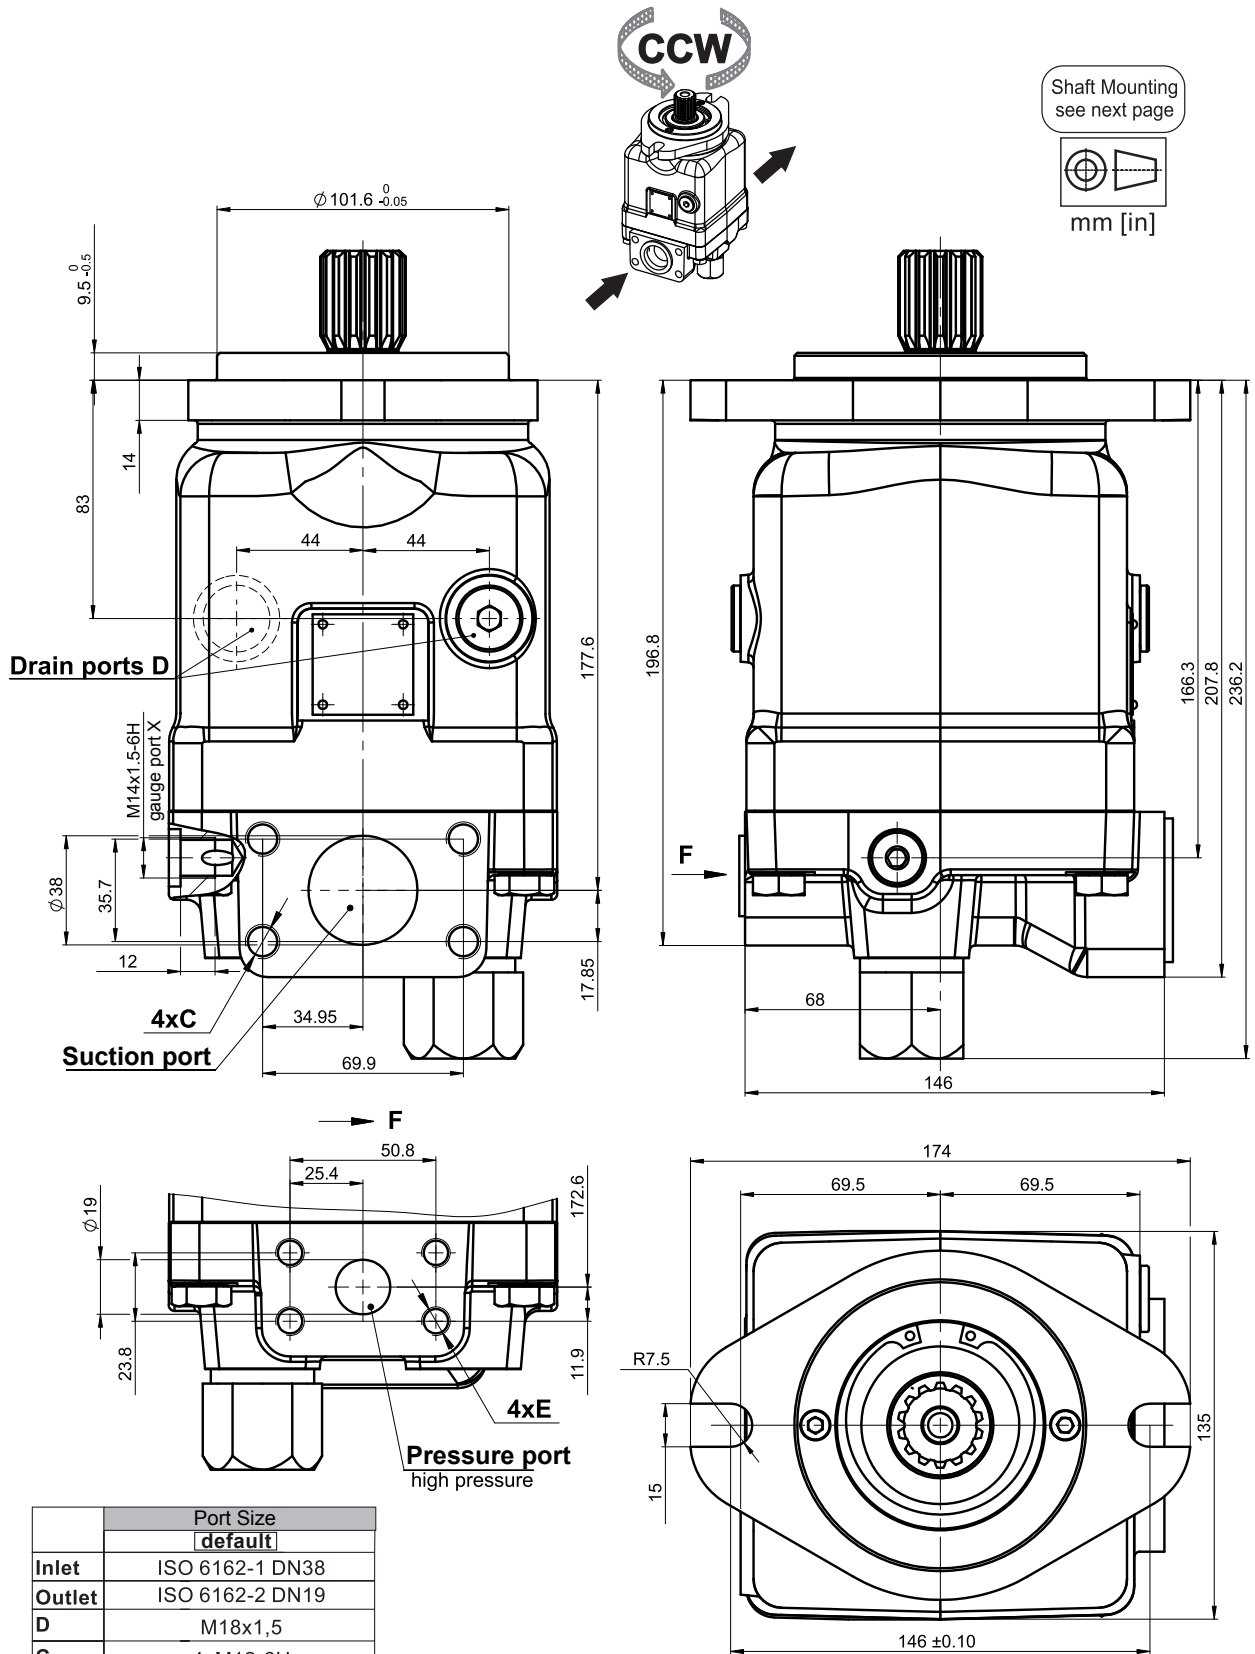

**Shafts Mounting**

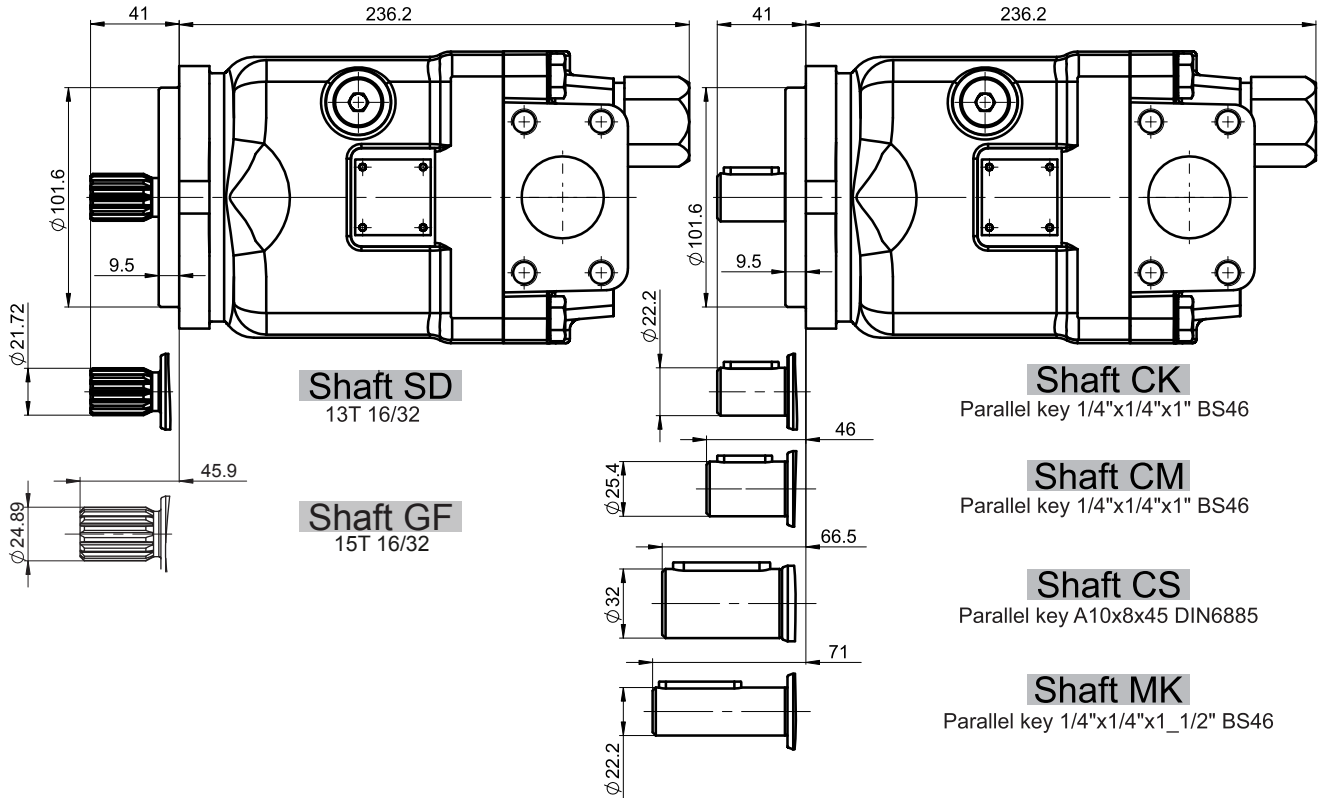

**Shaft SD**  
13T 16/32

**Shaft GF**  
15T 16/32

**Shaft CK**  
Parallel key 1/4"x1/4"x1" BS46

**Shaft CM**  
Parallel key 1/4"x1/4"x1" BS46

**Shaft CS**  
Parallel key A10x8x45 DIN6885


**Shaft MK**  
Parallel key 1/4"x1/4"x1\_1/2" BS46

Shaft Dimensions  
See Page 13

**PERMISSIBLE SHAFT LOAD**

Permissible shaft load		
max Axial	N	Fa=2000 [450]
max Radial	N	Fr=3600 [810]


The calculated max values are based on the optimal direction of the forces Fr, Fa and optimal position of the shaft (see page 15).



**Shaft Types and Dimensions**


**SD**

**ø21.72** M8-6H thread  
**13T 16/32 DP** splined ANSI B92.1-1970  
Max. torque 220 Nm

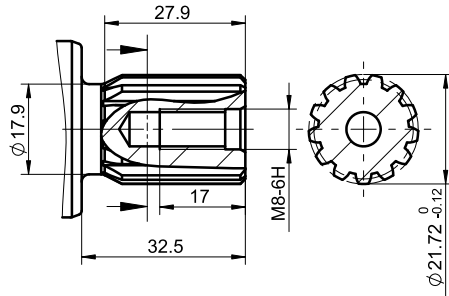


**GF**

**ø 24.89 SAE-BB** 3/8-16 UNC-2B thread  
**15T 16/32 DP** splined ANSI B92.1-1970  
Max. torque 360 Nm

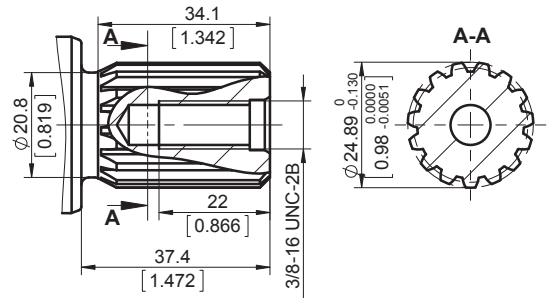


**CK**

**ø22.2** straight, M8-6H thread  
Parallel key **1/4"x1/4"x1"** BS46  
Max. torque 180 Nm

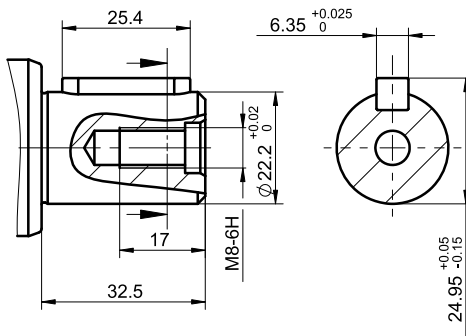


**CM**

**ø25.4** straight, M8-6H thread  
Parallel key **1/4"x1/4"x1"** BS46  
Max. torque 250 Nm

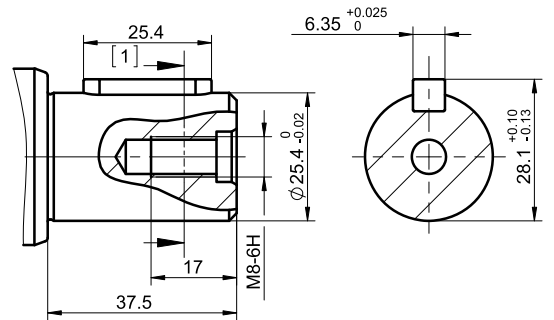


**CS**

**ø32** straight, M8-6H thread  
Parallel key **A10x8x45** DIN6885  
Max. torque 565 Nm

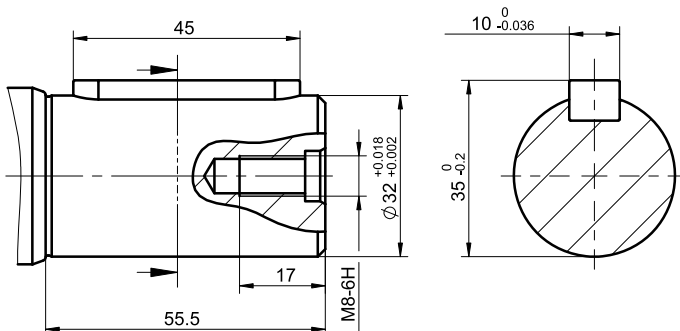


**MK**

**ø22.2** straight, M8-6H thread  
Parallel key **1/4"x1/4"x1 1/2"** BS46  
Max. torque 180 Nm

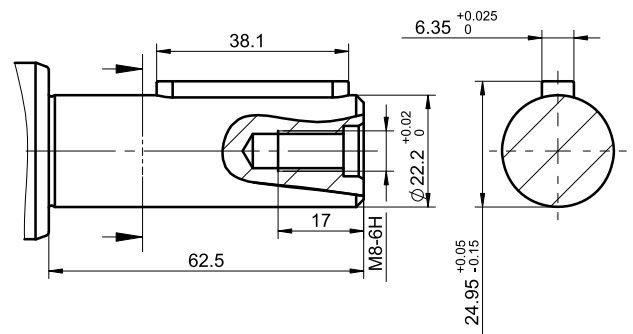

The required max. torque must not be exceeded



ORDERING CODE

	1	2	3	4	5	6	7
TPF							

Pos.1 - Mounting Flange

**B** - SAE B - 2-Bolt flange  
spigot diam. 101,6 mm - BC 146 mm

Pos.5 - Port Size

omit - Inlet ISO 6162-1 DN38, Outlet ISO 6162-2  
DN19, metric thread, drain ports M18x1.5

Pos.2 - Displacement Code

**35** - 36.16 cm.<sup>3</sup>/rev.  
**40** - 41.59 cm.<sup>3</sup>/rev.  
**46** - 47.13 cm.<sup>3</sup>/rev.  
**50** - 49.94 cm.<sup>3</sup>/rev.

Pos.6 - Seal, Corrosion Resistant Seal Surface

omit - NBR seal type material  
**V** - FKM seal type material

Pos.3 - Direction of Rotation

**R** - CW, Right direction  
**L** - CCW, Left direction

Pos.7 - Special Features

omit - None  
**R2S** - Speed sensor two directional

Pos.4 - Shaft Extensions\*

**SD** - ø21,72 spline SAE 13T 16/32 DP, M8  
**GF** - ø24.9 Spline SAE 15T 16/32, 3/8-16 UNC-2B  
**CK** - ø22.2 straight, M8-6H thread  
Parallel key 1/4"x1/4"x1" BS46  
**MK** - ø22.2 straight, M8-6H thread  
Parallel key 1/4"x1/4"x1\_1/2" BS46  
**CM** - ø25.4 straight, M8-6H thread  
Parallel key 1/4"x1/4"x1" BS46  
**CS** - ø32 straight, M8-6H thread  
Parallel key A10x8x45 DIN6885



\* The permissible output torque for shafts must not be exceeded!

We remain open to meet your special requirements upon request.

**Speed Sensors**

**MOUNTING DIMENSIONS**

**TPF 60**

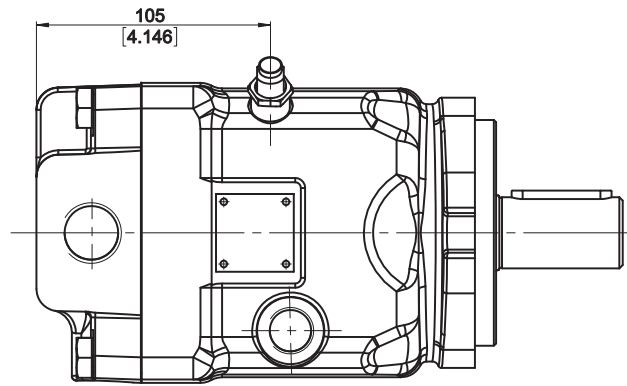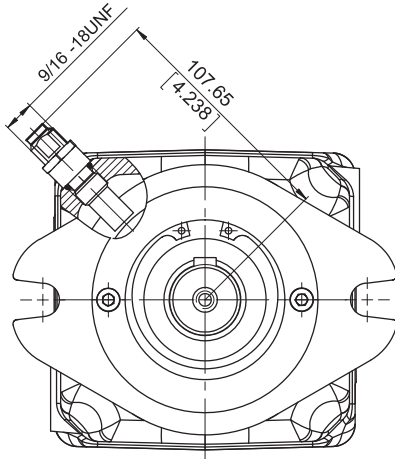

**INSTALLATION**

1. Turn in (CW) by hand until bottom end gently touches the speed ring.
2. Back out (CCW) 1/4 turn. Continue backing out until the flats are 22° either side of pump or motor shaft center line (20° to 30° is acceptable). Do not back out the sensor more than 3/4 of a turn from touching.
3. Using the 1/2 inch wrench to hold the sensor, torque the lock nut to 13[115] Nm [lb-in] with an 11/16 inch hew wrench.



**Speed Sensors**

**TECHNICAL DATA OF THE SPEED SENSOR**

**TECHNICAL DATA**


Power supply	4.5 ... 30 VDC
Power consumption	< 15 mA without load
Pin connector	universal /PUSH-PULL/ 4P Delphi Connector DJ3042&-2.5-21
Output measurements	Speed, Direction
Output maximum current	100 mA
Resident output voltage	1.5 V with 100 mA of the output 0.5 V without load of the output
Frequency range	0 ... 15 000 Hz
Degree of protection	IP 67
Temperature	-40 ... + 100 °C
Humidity	0 ... 95% RH

**OUTPUT PULSES**

per revolution


<b>Pump Type</b>	<b>TPF 60</b>
<b>Output Pulses</b>	<b>50</b>

**OUTPUT DIAGRAMS**

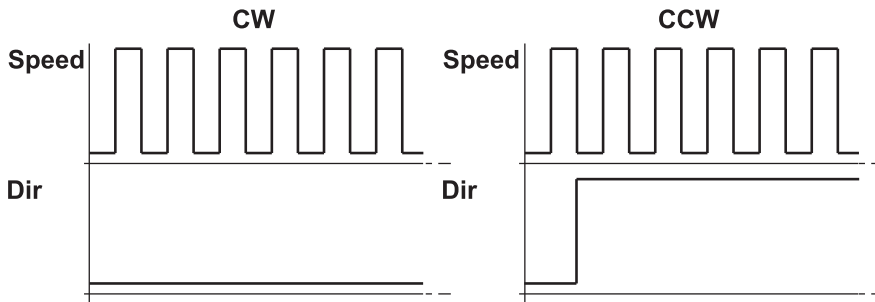

**PIN CONNECTOR**


4 pin Delphi Connector




**WIRING DIAGRAMS**

Sensor could be in use for both type of connections - PNP or NPN


**PNP**

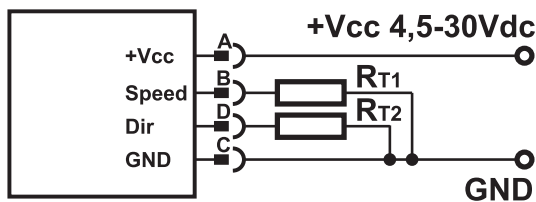

**NPN**

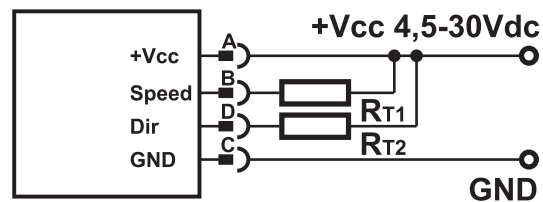

**SENSOR OVERALL DIMENSIONS**

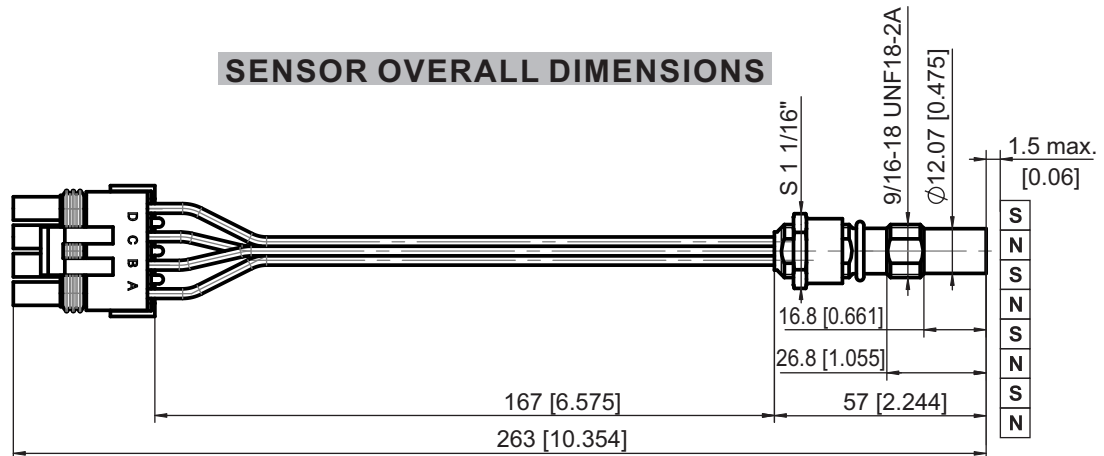




**INSTALLATION**

**DIRECTION OF ROTATION**


**Standard Rotation**

Viewed from shaft end  
Port A Pressurized - CW  
Port B Pressurized - CCW

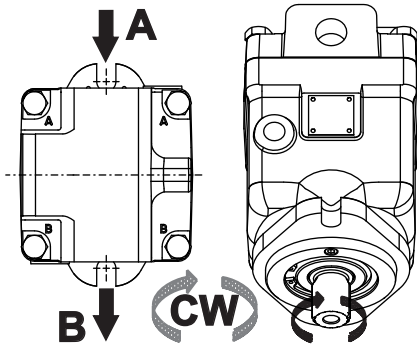

**Reverse Rotation**



Viewed from shaft end  
Port A Pressurized - CCW  
Port B Pressurized - CW

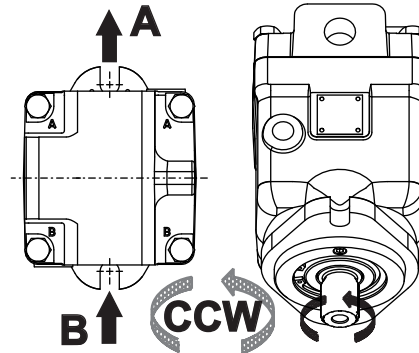



**BEST POSITION FOR APPLYING RADIAL LOAD**

Optimal position for applying radial load depending on the direction of rotation

**Standard Rotation**

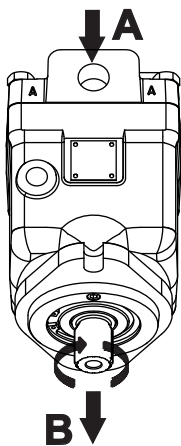


**Reverse Rotation**

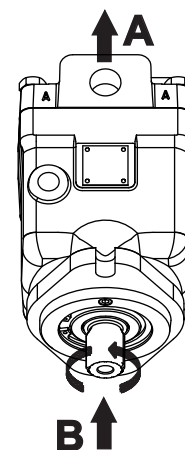


**INSTALLATION**

At start-up and during operation the pump housing has to be filled up with hydraulic fluid. Start-up has to be carried out at low or moderate speed and without load (for example 1000 rpm and pressure 50 bar [725 PSI]) till the pump and the hydraulic scheme are filled up with oil. Typically the start-up needs 10-15 minutes to finish. The leakage oil in the housing has to be discharged to the tank through the highest positioned drain port D. The max. pressure in the drain line is 5 bar.

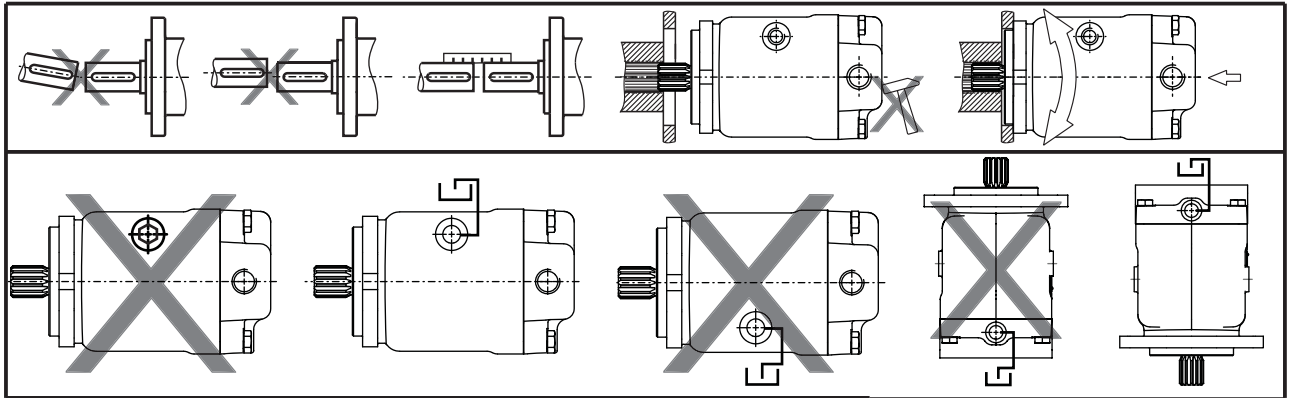


**Installation below tank level (recommended)**

- Fill up the axial piston pump before the start-up through the highest positioned drain port D.
- Operate the pump at low speed till the pump system is completely filled up.
- The minimum immersion depth of the drain line in the tank is 200 mm relative to the minimum oil level in the tank.

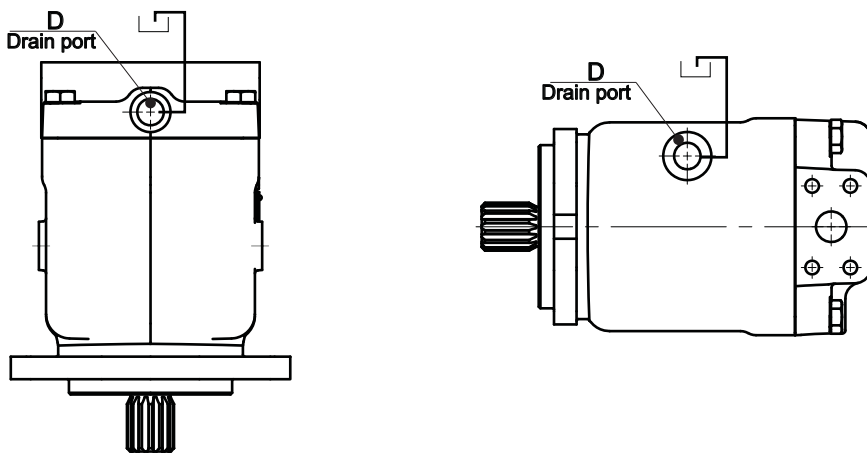



**Installation on top of tank level**

- Fill up the axial piston pump before the start-up through the highest positioned drain port D.
- Operate the pump at low speed till the pump system is completely filled up.
- The minimum immersion depth of the drain line in the tank is 200 mm relative to the minimum oil level in the tank.

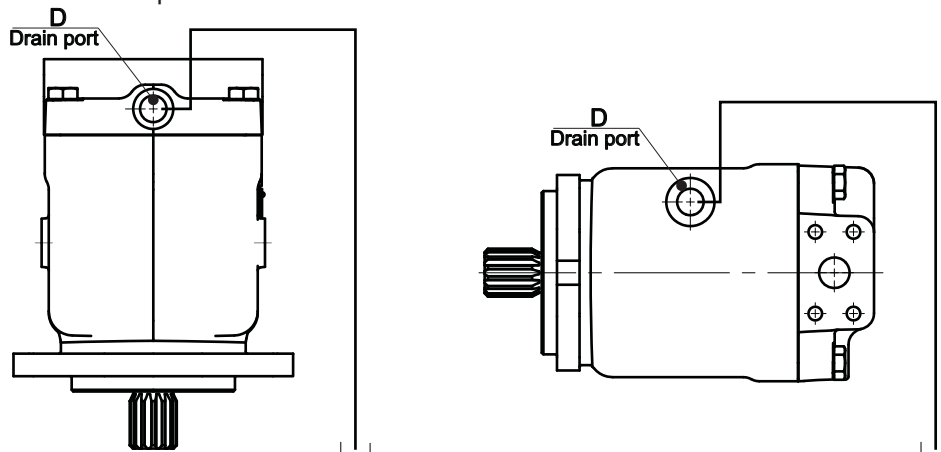

## INSTALLATION

Recommended max. tightening torque X for metal plugs and orifice

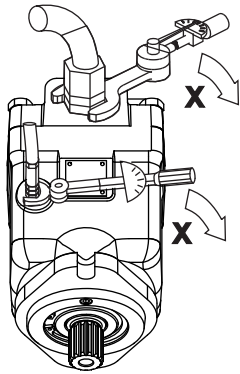


Screwed connection	Max. Tightening Torque X, Nm			
	With copper washer	With aluminium washer	With cutting edge	With "O" ring
G 1/4	20	30	40	20
G 3/8	20	50	60	20
G 1/2	30	80	100	30
G 3/4	50	130	160	50
G 1	80	200	250	80
M 8	20	10	20	
M 10	20	10	20	
M 12	20	30	40	
M 14x1,5	20	30	40	30
M 16x1,5	20	50	60	50
M 18x1,5	20	50	60	50
M 20x1,5	30	80	100	80
M 22x1,5	30	80	100	80
M 24x1,5	20	30	40	100
M 27x2	50	130	100	100

**Fluid Viscosity Limits**

In order to obtain optimum efficiency and service life, we recommend to select the operating viscosity (at operating temperature) within the range shown on diagram below.

Kinematic viscosity

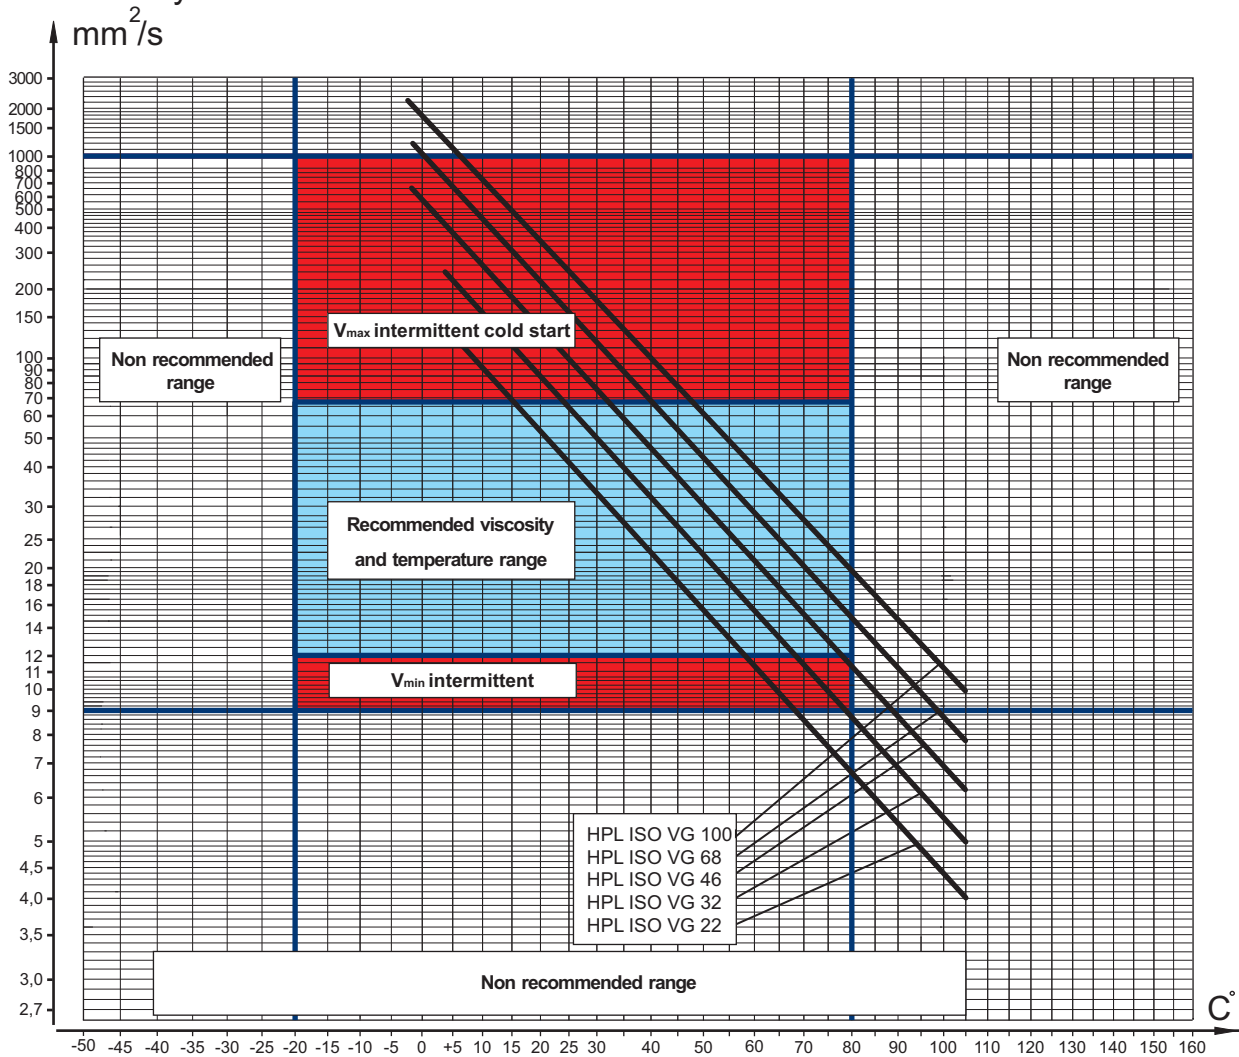

Temperature

The above - shown viscosity characteristics are for reference only. Please, check the actual viscosity with the manufacturer of the fluid.

## Basic Formulas

The motor(pump) size, pressure and flow required for a specific application can be calculated using the formulas below.

### Metric System

<b>Efficiency</b>	$\eta_t = \eta_{mh} \cdot \eta_v$ $\eta_{mh} = \frac{\eta_t}{\eta_v}$ $\eta_v = \frac{\eta_t}{\eta_{mh}}$	
<b>Input flow</b> (for Motor)	$Q = \frac{Vg \cdot n}{1000 \cdot \eta_v}$	[l/min]
<b>Output torque</b> (for Motor)	$M = \frac{Vg \cdot \Delta p \cdot \eta_{mh}}{62,8}$	[Nm]
<b>Output power</b> (for Motor)	$P = \frac{M \cdot n}{9550} = \frac{Q \cdot \Delta p \cdot \eta_t}{60}$	[kW]
<b>Speed</b> (for Motor)	$n = \frac{Q \cdot 1000 \cdot \eta_v}{Vg}$	[min <sup>-1</sup> ]
<b>Output flow</b> (for pump)	$Q = \frac{Vg \cdot n \cdot \eta_v}{1000}$	[l/min]
<b>Driving torque</b> (for pump)	$M = \frac{Vg \cdot \Delta p}{62,8 \cdot \eta_{mh}}$	[Nm]
<b>Input power</b> (for pump)	$P = \frac{M \cdot n}{9550} = \frac{Q \cdot \Delta p}{60 \cdot \eta_t}$	[kW]
	Vg = Displacement per rev.	[cm <sup>3</sup> ]
	$\Delta p = p_{HP} - p_{LP}$	[bar]
	$p_{HP}$ = High pressure	[bar]
	$p_{LP}$ = Low pressure	[bar]
	$\eta_v$ = Volumetric efficiency	
	$\eta_{mh}$ = Mechanical-hydraulic efficiency	
	$\eta_t$ = Overall efficiency	

## Application Formulas

### Motorspeed: n

$$n = \frac{2,65 \cdot v_{km} \cdot i}{R_m} \quad n = \frac{168 \cdot v_{mi} \cdot i}{R_{in}}$$

$v_{km}$  - vehicle speed [km/h]

$v_{mi}$  - vehicle speed [mil/h]

$R_m$  - wheel rolling radius [m]

$R_{in}$  - wheel rolling radius [in]

$i$  - gear ratio between motor and wheels.

If no gearbox, use  $i=1$ .

### Radial motor loading: $P_{rad}$ , N


When the motor is used for motion with a ring or gear mounted directly on the motor shaft, the total radial load of the motor shaft  $P_{rad}$  is the sum of the motion force and the weight force acting on ring.

$G_w$  - Weight held by the shaft

$P_{rad}$  - Total radial load of the motor shaft

$M/R$  - Motion force

$$P_{rad} = \sqrt{G_w^2 + \left(\frac{M}{R}\right)^2}$$



### Total tractive effort: TE, N

Total tractive effort **TE** is the total effort necessary for vehicle motion i.e. the sum of the calculated forces increased by 10 % because of air resistance.

$$TE = 1,1 \cdot (RR + GR + FA + DP)$$

**RR** - force required to overcome the rolling resistance

**GR** - force required to slope upwards

**FA** - force required to accelerate (acceleration force)

**DP** - additional tractive effort (trailer)

### Motor Torque moment: M, Nm

Necessary torque for the hydraulic motor:

$$M = \frac{TE \cdot R_m [R_{in}]}{N \cdot i \cdot \eta_M}$$

$i$  - motor numbers

$\eta_M$  - mechanical gearbox efficiency (if it is available)


Depending on the results of the load calculations, the most appropriate type of motor from the catalogue is selected.

## PUMPS



Closed Loop Axial Piston Pumps (Variable Displacement) - 6-110 cc

Model	Displacement cm <sup>3</sup> /n.	Rated Pressure MPa	Peak Pressure MPa	Maximum speed n/min.	Weight kg (single pump)
TPV 1100 TPV 1300	6, 8, 9, 11, 12, 13	30	35	3.600	8,8
	15, 17		30		
	18		30		
	19, 21	22	28	3.200	
TPV-TPVTC 1500	17, 18, 19, 21	35	40	3.600	14
TPV 3200	21, 28	25	35		22
TPV-TPVT 3600	26, 28, 30, 31, 32, 34, 36, 38	40	45		28
TPV 4300	32, 38, 45, 50	28	35		23
TPV 5000	46, 50, 64	30	40		29
TPV 9000	55	40	45		4.000
	72			4.100	68
	90			4.000	
	110			3.800	



Open Loop Axial Piston Pumps (Fixed Displacement) - 32-50 cc

Model	Displacement cm <sup>3</sup> /n.	Rated Pressure MPa	Peak Pressure MPa	Maximum speed n/min.	Weight kg (single pump)
TPF 60	35, 40, 46	35	42	2.800	20,5
	50		41	2.500	



Bent Axis Pumps - 12-130 cc

Model	Displacement cm <sup>3</sup> /n.	Rated Pressure MPa	Peak Pressure MPa	Maximum speed n/min.	Weight kg
TPB - TAP 70	12.6	35	40	3.300	7,5
	17.0			3.200	
	25.4			2.550	8,5
	34.2			2.250	
	41.2, 47.1			2.200	15,5
	56.0			2.100	
	63.6			2.050	
	83.6, 90.7, 108.0			1.700	27,0
	130.0			1.600	29,5

The table values can change in function of the configuration.



As HANSA-TMP has a very extensive range of products and some products have a variety of applications, the information supplied may often only apply to specific situations.

If the catalogue does not supply all the information required, please contact HANSA-TMP.

In order to provide a comprehensive reply to queries we may require specific data regarding the proposed application.

Whilst every reasonable endeavour has been made to ensure accuracy, this publication cannot be considered to represent part of any contract, whether expressed or implied.

The data in this catalogue refer to the standard product. The policy of HANSA-TMP consists of a continuous improvement of its products. It reserves the right to change the specifications of the different products whenever necessary and without giving prior information.



**HANSA-TMP S.r.l.**  
Via M. L. King, 6 – 41122 Modena (ITALY)  
Tel.: +39 059 415 711  
Fax: +39 059 415 730  
E-mail: [hansatmp@hansatmp.it](mailto:hansatmp@hansatmp.it)  
Website: [www.hansatmp.it](http://www.hansatmp.it)

Certified Company  
ISO 9001:2015 – ISO 14001:2015



Share Capital: € 300.000,00  
VAT Number: IT01167360369  
REA Number: MO-225785