



HANSA-TMP

MANUFACTURING YOUR SUCCESS

HT 73 / G / 201 / 0621 / IE / V

Automotive Control Card

MAV 8 SH



MAV8SH – Main features




- Power supply: 9 to 33V DC
- CPU: 32 bit
- Analog input: up to 8
- Proportional PWM output: up to 8 x 2 x 2A max.
- Digital inputs: up to 12
- Digital outputs: up to 2 x 3A max.
- CAN BUS Connection: 2
- Calibration port: 1 x RS-232 (USB Optional)
- Operating temperature: from -40°C to +70°C
- Protection degree: IP66
- Customizable software for tracked drive and wheel drive vehicle

MAV8SH – Built in software




- Automotive Control
- Tracked vehicle control
- Constant speed/flow control
- Torque control


Automotive control

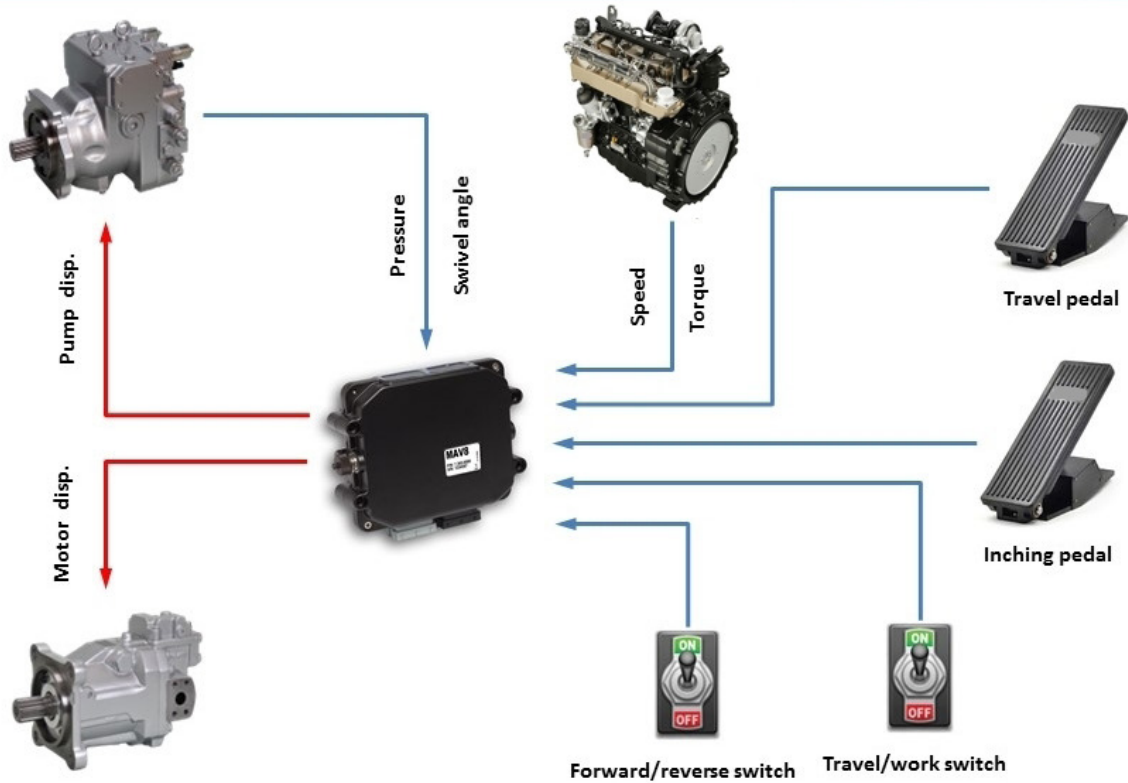

Tracked vehicle control

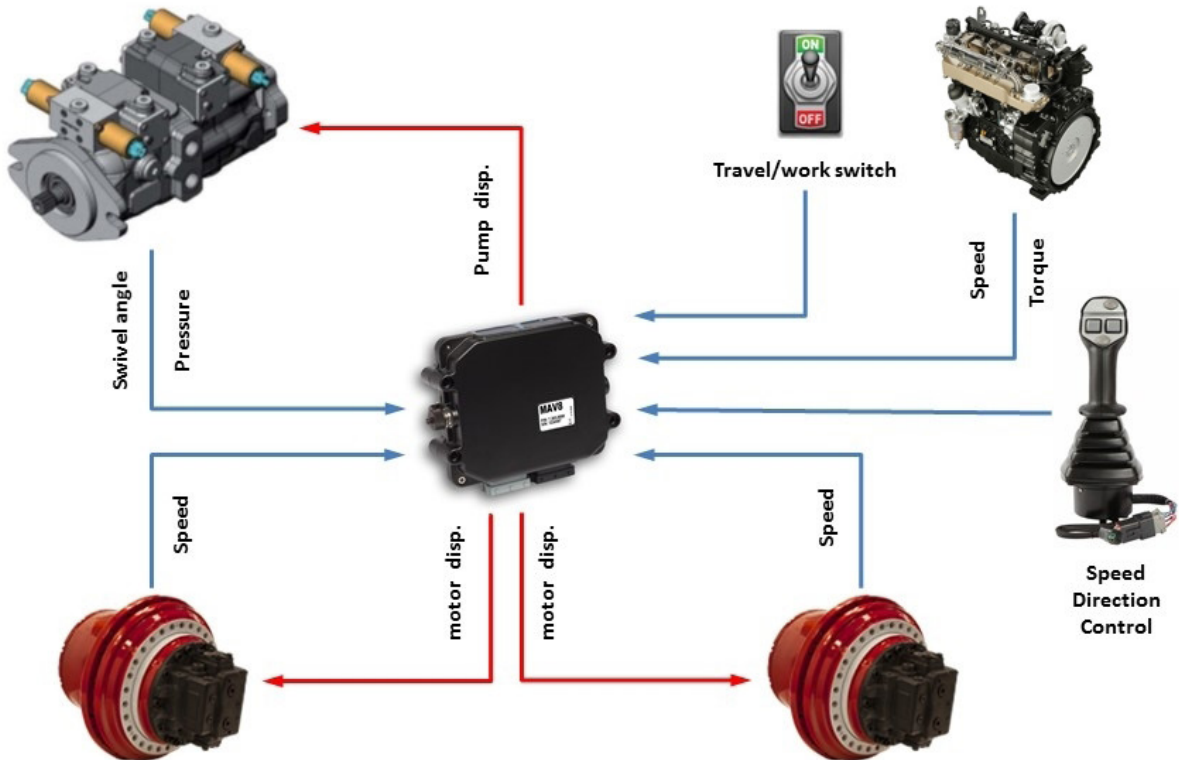

Constant speed control

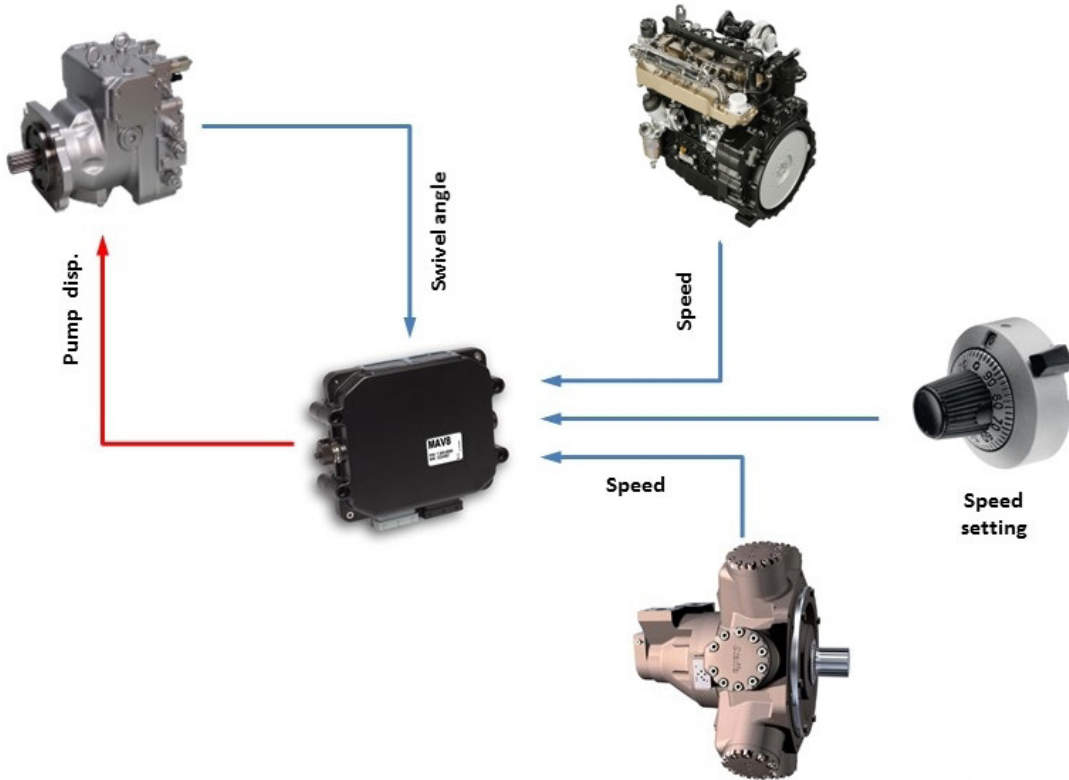

Torque control

